




MERCURY DISPLACEMENT INDUSTRIES, INC.
 Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710
 Phone (269) 663-8574 - Fax (269) 663-2924
 (800) 634-4077

35NOC-24DHX-18

Hazardous Location

Class 1 Div 2 Groups A, B, C, & D

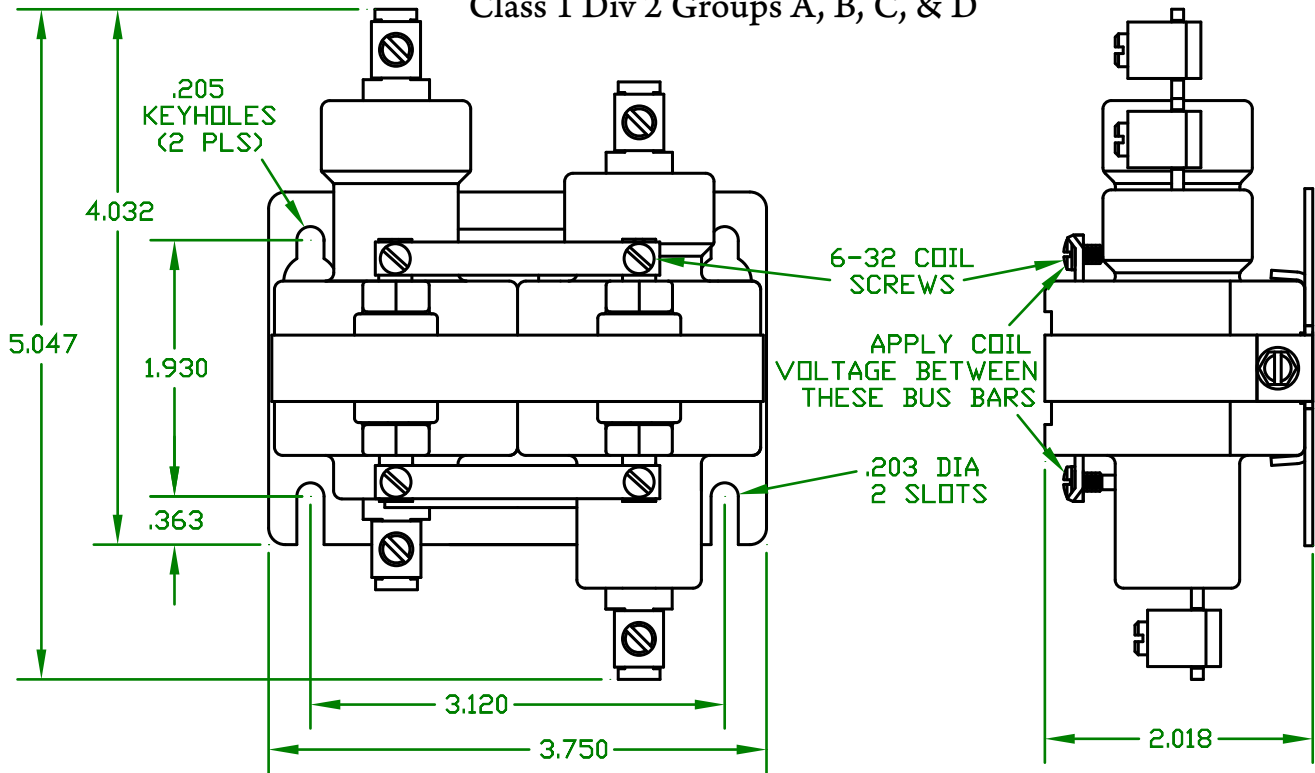

- * CONTACT RESISTANCE .003 ohms
- * OPERATE TIME N.O. POLE 50 MILLISECONDS
N.C. POLE 45 MILLISECONDS
- * RELEASE TIME N.O. POLE 80 MILLISECONDS
N.C. POLE 60 MILLISECONDS
- * RATINGS:
 CONTACTS: 35 AMP @ 480 VAC
 RESISTIVE OR GEN. PUPOSE
 COIL: 120V 50/60 Hz
 CURRENT: 272 mA
 RESISTANCE: 88 Ω
 VA: 6.6 WATTAGE: 6.6
- * TEMPERATURE RANGE -35° TO +85° C
- * COIL TERMINALS #6 BINDING HEAD SCREWS
TORQUE TO 7 IN-LB
- * LOAD TERMINALS 4-14 A.W.G. COMPRESSION
TYPE TORQUE TO 31.5 IN-LB
- * DIELECTRIC WITHSTAND 2,500 VAC RMS
- * TWO POLE / SINGLE THROW
- * MAGNETICALLY ACTIVATED
- * MERCURY CONTACTOR
- * LIFE CYCLE ENDURANCE TESTS: U.L. 508 @ 100,00 & CSA 22.2 @ 250,000 CYCLES

Contactors - Relays - Switches