



MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710

Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077

DRC-220A-0.2

NORMALLY CLOSED TIME DELAY RELAY

ACCEPTS 6 TO 14 AWG

LINE

LOAD

.205" DIA.
(2) HOLES

1 $\frac{3}{16}$ "

1 $\frac{5}{8}$ "

6-32
COIL SCREW

1 $\frac{3}{16}$ "

1 $\frac{13}{16}$ "

3 $\frac{1}{2}$ "

2 $\frac{5}{32}$ "



939S
LISTED

INDUSTRIAL CONTROL
EQUIPMENT



LR 41198
CERTIFIED

* DIELECTRIC WITHSTAND 2,500 VAC RMS

* RELEASE TIME 0.2 SECONDS

* RATINGS:

CONTACTS: 10 AMPS @ 120 VAC
PILOT DUTY RATING 720 VA

COIL: 220V 50/60 Hz


* TEMPERATURE RANGE -35° TO +85° C

* COIL TERMINALS #6 BINDING HEAD SCREWS
TORQUE TO 7 IN-LB

* SINGLE POLE / SINGLE THROW

* MAGNETICALLY ACTIVATED

* MERCURY TO MERCURY CONTACTOR

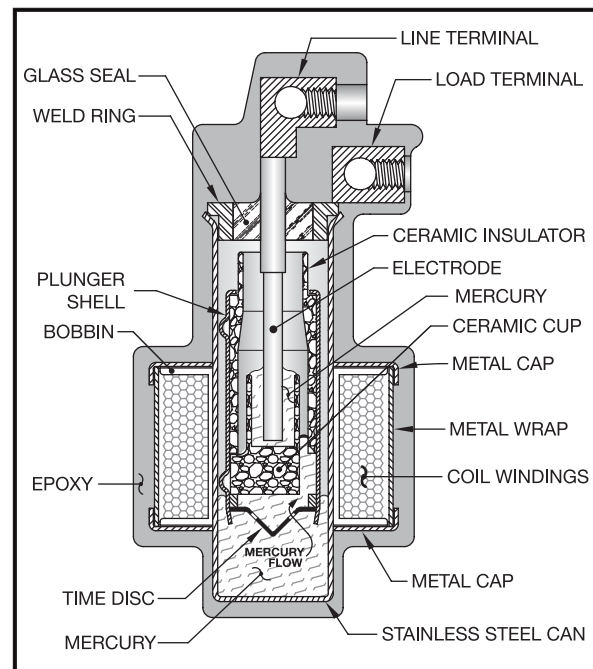

Contactors - Relays - Switches

J.J.S. May 19, 2016

<http://www.mdus.com>