MERCURY DISPLACEMENT INDUSTRIES, INC.
Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710
Phone (269) 663-8574 - Fax (269) 663-2924
(800) 634-4077

S100NO-120A

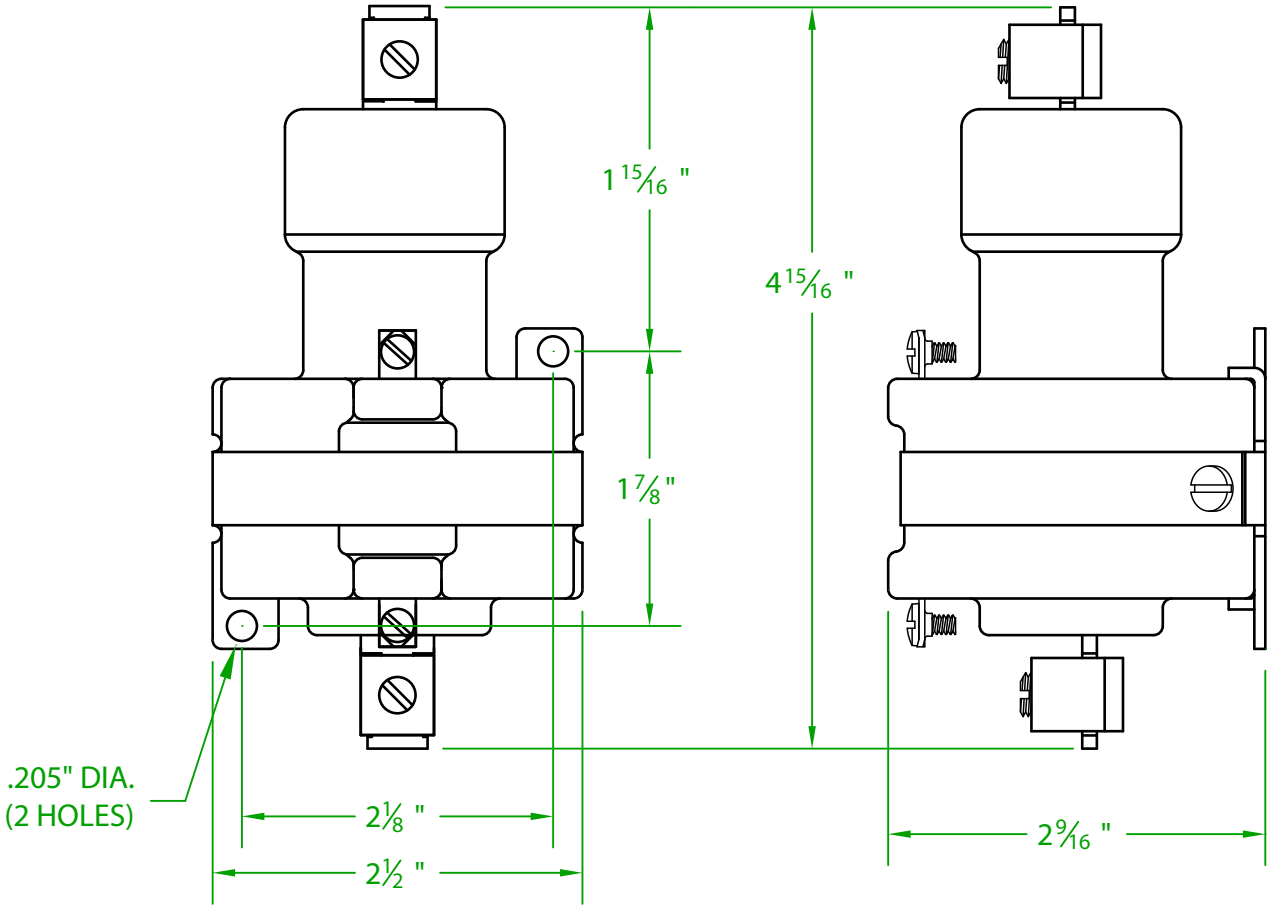

* CONTACT RESISTANCE .001 ohms
* DIELECTRIC WITHSTAND 2,500 VAC RMS
* OPERATE TIME 50 MILLISECONDS
* RELEASE TIME 80 MILLISECONDS
* RATINGS:
  CONTACTS: 100 AMPS @ 480 VAC
  COIL: 120V 50/60 Hz
  RESISTIVE

* TEMPERATURE RANGE -35° TO +85° C
* COIL TERMINALS #6 BINDING HEAD SCREWS
  TORQUE TO 7 IN-LB
* LOAD TERMINALS 1-8 A.W.G. COMPRESSION
  TYPE TORQUE TO 45 IN-LB
* SINGLE POLE / SINGLE THROW
* MAGNETICALLY ACTIVATED
* MERCURY CONTACTOR