



MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710


Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077



INDUSTRIAL CONTROL EQUIPMENT

230NO-24A-17

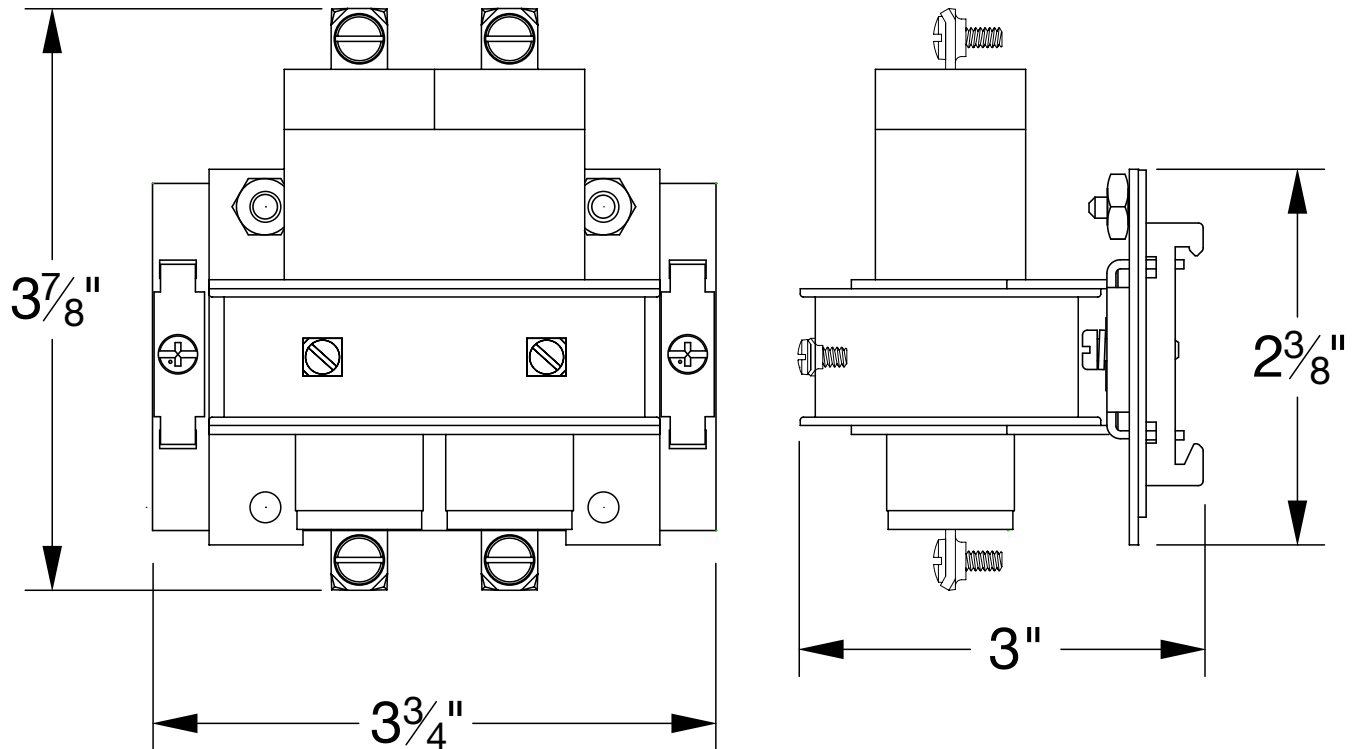

- * CONTACT RESISTANCE .003 ohms
 - * DIELECTRIC WITHSTAND 2,500 VAC RMS
 - * OPERATE TIME 50 MILLISECONDS
 - * RELEASE TIME 80 MILLISECONDS
 - * RATINGS:
 - CONTACTS: 30 AMP @ 600 VAC
RESISTIVE
 - COIL: 24V 50/60 Hz
 - CURRENT: 610mA
 - RESISTANCE: 12.5 Ω
 - VA: 14.6 WATTAGE: 4.7
 - * TEMPERATURE RANGE -35° TO +85° C
 - * COIL TERMINALS #6 BINDING HEAD SCREWS
TORQUE TO 7 IN-LB
 - * LOAD TERMINALS 8-32 WIRE BINDING SCREWS
 - * TWO POLE / SINGLE THROW
 - * MAGNETICALLY ACTIVATED
 - * MERCURY CONTACTOR
- * LIFE CYCLE ENDURANCE TESTS: U.L. 508 @ 100,00 & CSA 22.2 @ 250,000 CYCLES

Contactors - Relays - Switches

08-08-2012 J.J.S.

<http://www.mdious.com>