



# MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710


Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077



INDUSTRIAL CONTROL EQUIPMENT

## 35NOOCC-12DTH-18

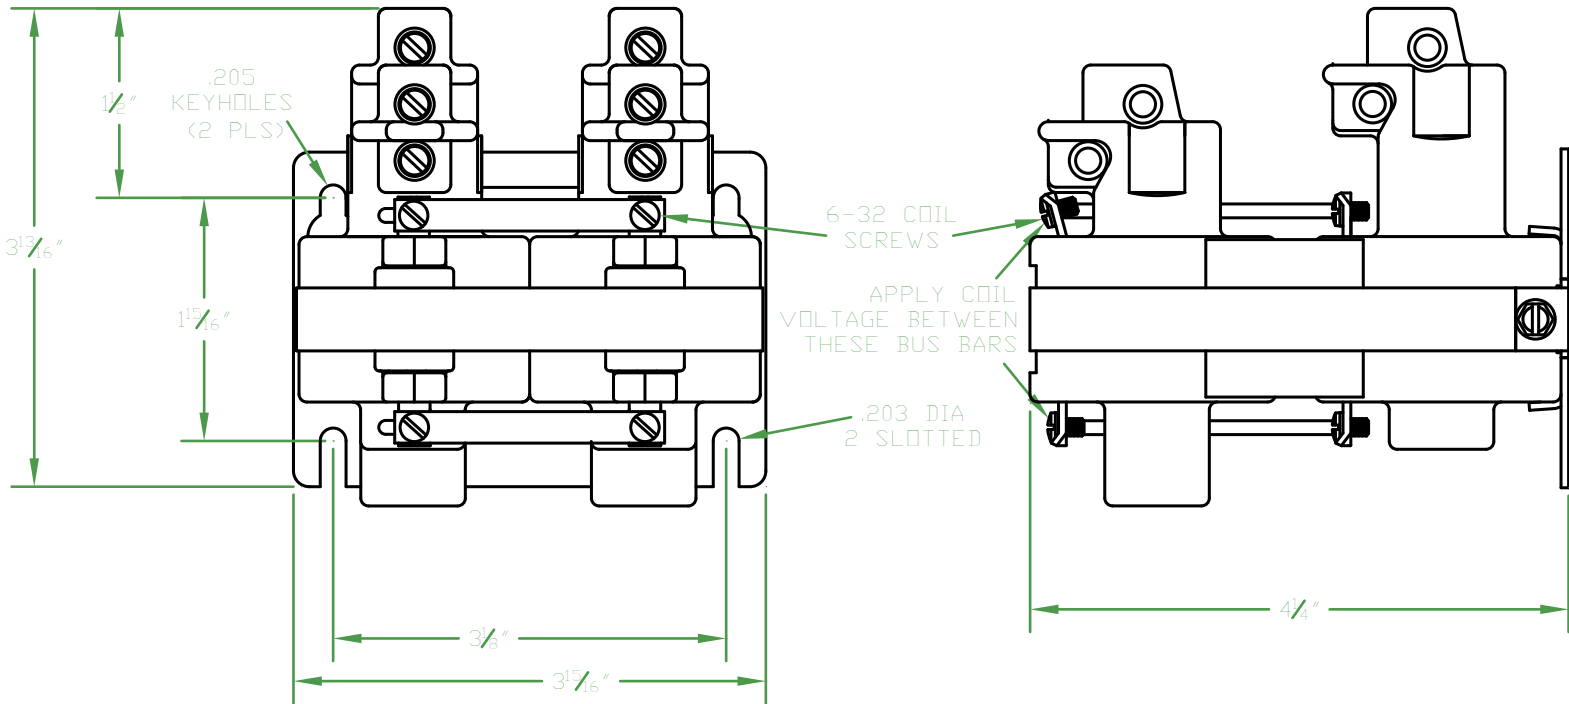

- \* CONTACT RESISTANCE .003 ohms
- \* DIELECTRIC WITHSTAND 2,500 VAC RMS
- \* OPERATE TIME N.O. POLE 50 MILLISECONDS  
N.C. POLE 45 MILLISECONDS
- \* RELEASE TIME N.O. POLE 80 MILLISECONDS  
N.C. POLE 60 MILLISECONDS
- \* RATINGS:  
CONTACTS: 35 AMPS @ 480 VAC  
RESISTIVE OR GENERAL PURPOSE  
COIL: 12 V.D.C.  
CURRENT: 1332 mA  
RESISTANCE: 9  $\Omega$   
VA: 16 WATTAGE: 16
- \* TEMPERATURE RANGE  $-35^{\circ}$  TO  $+85^{\circ}$  C
- \* COIL TERMINALS #6 BINDING HEAD SCREWS  
TORQUE TO 7 IN-LB
- \* LOAD TERMINALS 6-14 A.W.G. COMPRESSION  
TYPE TORQUE TO 31.5 IN-LB
- \* 4 POLE / SINGLE THROW
- \* MAGNETICALLY ACTIVATED
- \* MERCURY CONTACTOR

\* LIFE CYCLE ENDURANCE TESTS: U.L. 508 @ 100,00 & CSA 22.2 @ 250,000 CYCLES

Contactors - Relays - Switches

J.J.S. December 03, 2014

<http://www.mdious.com>